

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 April 2004 (15.04.2004)

PCT

(10) International Publication Number
WO 2004/031015 A1

(51) International Patent Classification⁷: **B61H 7/08**
(21) International Application Number:
PCT/EP2003/010990

(22) International Filing Date: 3 October 2003 (03.10.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0223196.7 7 October 2002 (07.10.2002) GB

(71) Applicant (for all designated States except US): **BOMBARDIER TRANSPORTATION GMBH** [DE/DE];
Saatwinkler Damm 43, 13627 Berlin (DE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **BIEKER, Guido**
[DE/DE]; Ennestweg 7, 57399 Kirchhundem (DE).

(74) Agent: **AKERS, Noel, J.**; Howrey Simon Arnold & White,
City Point, One Ropemaker Street, London EC2Y 9HS
(GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **MAGNETIC RAIL BRAKE**

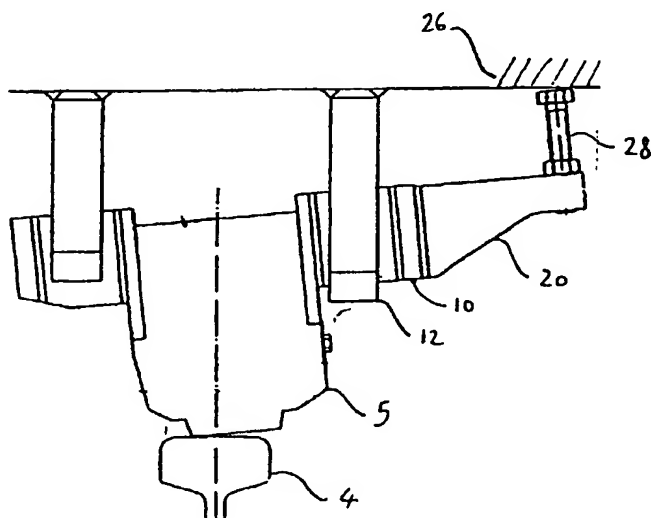

(57) ~~Abstract:~~ A magnetic rail brake for a rail vehicle is disclosed of the type comprising a magnet (5) supported from the rail vehicle a small distance above the rail (4). The magnet is supported by springs which are overridden on actuation of the magnet. A guide assembly guides the magnet for movement in a substantially vertical plane while allowing limited lateral movement. The magnet is provided with an extension arm (20) arranged to contact the rail vehicle at a distance from the magnet which is substantially greater than either the maximum extent of vertical movement or the maximum extent of lateral movement. By controlling the motion of the extension arm within these limits of lateral and vertical motion, unwanted and excessive tilting of the magnet can be avoided.

WO 2004/031015 A1